



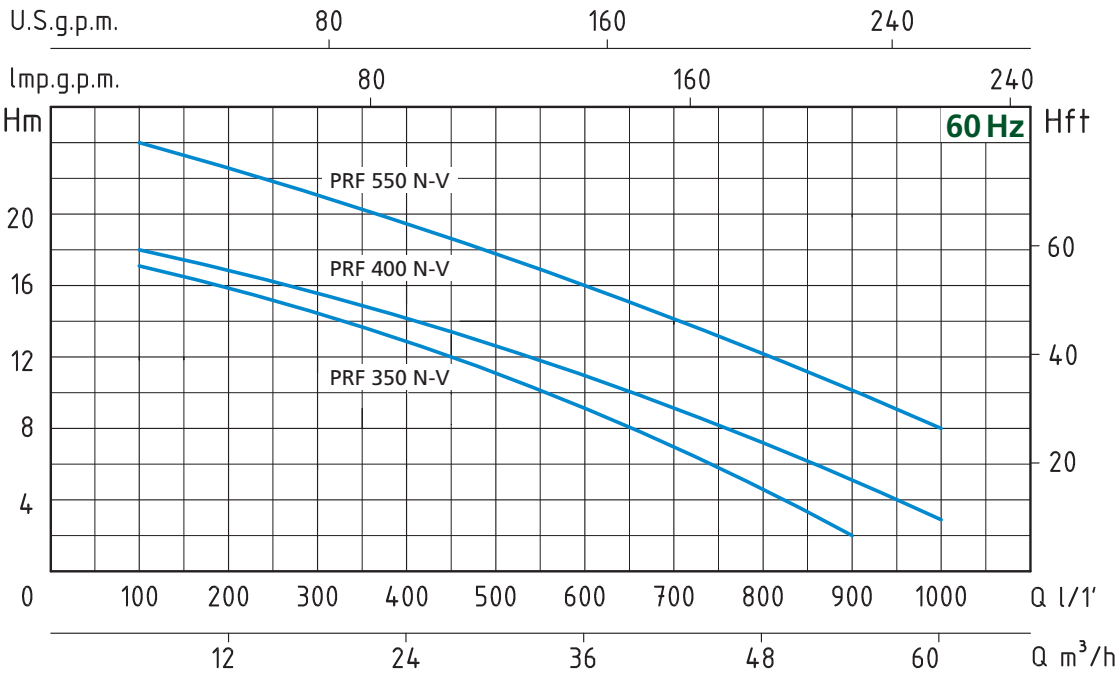

TIPO TYPE	POTENCIA NOMINAL NOMINAL POWER		POTENCIA ABSORBIDA INPUT POWER	AMPERIO AMPERE	Q = CAPACIDAD - CAPACITY									
	P2		P1											
Trifásico Three-phase				Trifásico Three-phase	m³/h	6	12	18	24	36	42	48	54	60
220/380V-60Hz	HP	kW	kW	3 x 380V	lt/1'	100	200	300	400	600	700	800	900	1000
PRF 350 N-V	3,5	2,5	3,5	6	Carga hidrostática manométrica total en m.C.A. - Total head in meters w.c.									
PRF 400 N-V	4	3	4,6	8,3	H (m)	17	16	15	13	9	7	5	2	
PRF 550 N-V	5,5	4	7	12		18	17	16	14	11	9	7	5	3
						24	23	21	19	16	14	12	10	8

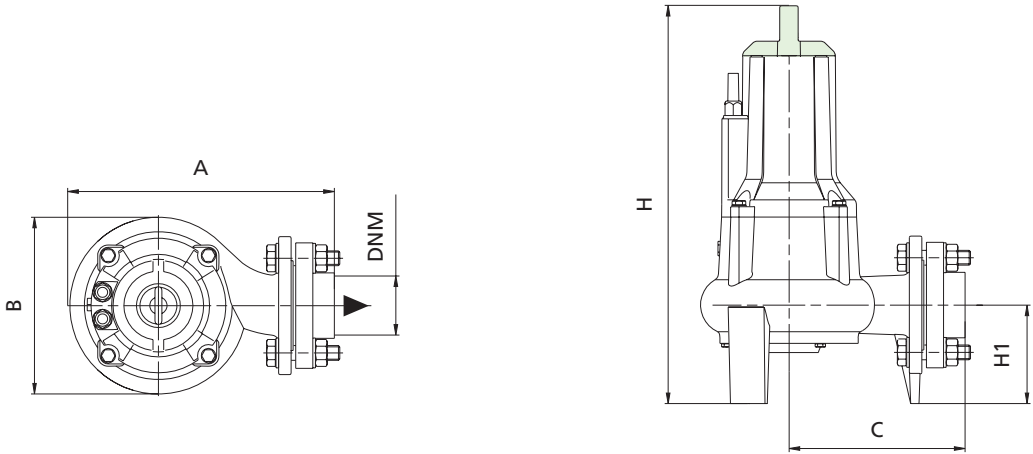

TIPO TYPE	DIMENSIONES mm - DIMENSIONS mm								DIMENSIONES DIMENSIONS mm			PESO WEIGHT
	A	B	C	H	H1	DNM	CABLE	Paso de sólidos (mm) Grain size inlet (mm)	P	L	H	
Trifásico Three-phase												Kg
PRF 350 N-V	358	256	229	593	143	3"	10 mt H07RN8-F	Ø 70	285	380	702	57,4
PRF 400 N-V	358	256	229	607	143	3"	10 mt H07RN8-F	Ø 70	285	380	702	62,1
PRF 550 N-V	358	256	229	628	143	3"	10 mt H07RN8-F	Ø 70	285	380	702	68,7