


SERIE VAV

VAV



VAV

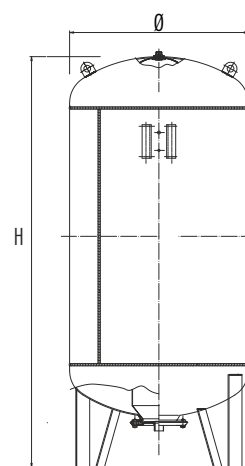

Vaso autoclave con membrana intercambiabile per circuiti di acqua sanitaria.
Pressure tank with replaceable membrane for pressurized systems of sanitary water.
Réservoir sous pression à vessie remplaçable pour systèmes d'eau sanitaire.
Vertikales Druckausdehnungsgefäß mit austauschbarer Membrane für Trinkwassersysteme.
Acumulador hidroneumático con membrana recambiable para circuitos de agua sanitaria.

Temperatura d'esercizio
Working temperature
Température d'exercice
Betriebstemperatur
Temperatura de trabajo

- 10° C
+ 100° C

Colore della verniciatura esterna
External finish color
Couleur de la peinture externe
Externe Beendenfarbe
Color pintura exterior

RAL 3000

Membrana in gomma
Rubber membrane
Vessie en gomme
Gummimembrane
Membrana en goma

EPDM

Controflangia verniciata - Painted counter flange
Contre-bride peinte - Lackierter Gegenflansch - Contra brida pintada



Garanzia sul prodotto mesi: - Warranty months:
Garantie mois: - Monate Garantie: - Garantía meses:

24

Modello Model Modèle Model Modelo	Codice Code Code Code Código	Altezza Height Hauteur Höhe Altura	Diametro Diameter Diamètre Durchmesser Diámetro	Lunghezza Length Longeur Länge Longitud	Pressione massima d'esercizio Maximun working pressure Pression maximale d'exercice Maximaler Betriebsdruck Presión máxima de trabajo	Pressione di precarica standard Standard precharge pressure Pression de précharge standard Vordruck Presión de precarga estándar	Imballo Packing Emballage Verpackung Embalaje	Attacco Connection Raccordement Anschluss Conexión
		H (mm)	Ø (mm)	L (mm)	(bar)	(bar)	(mm)	(inch)
VAV750	AAXVH31R31GPO	1900	750	-	10	4	(Pz1) 750X750X2030	2"
VAV1000	AAYVH31R31GPO	2180	800	-	10	4	(Pz1) 800X800X2330	2"
VAV1500	AAZVH31R31GPO	2360	960	-	10	4	(Pz1) 1200X1200X2500	2"
VAV2000	AAAVH32R32GPO	2520	1100	-	10	4	(Pz1) 1100X1100X2670	2"
VAV3000	AABVH32R32OP0	2760	1200	-	10	4	(Pz1) 120X1350X2760	DN65
VAV4000	AA4VH32R62QP0	3100	1450	-	10	4	(Pz1) 1430X1600X3100	DN80

Temperatura d'esercizio
Working temperature
Température d'exercice
Betriebstemperatur
Temperatura de trabajo

- 10° C
+ 100° C

Colore della verniciatura esterna
External finish color
Couleur de la peinture externe
Externe Beendenfarbe
Color pintura exterior

RAL 3000

Membrana in gomma
Rubber membrane
Vessie en gomme
Gummimembrane
Membrana en goma

BUTYL

Controflangia verniciata - Painted counter flange
Contre-bride peinte - Lackierter Gegenflansch - Contra brida pintada



Garanzia sul prodotto mesi: - Warranty months:
Garantie mois: - Monate Garantie: - Garantía meses:

24

Modello Model Modèle Model Modelo	Codice Code Code Code Código	Altezza Height Hauteur Höhe Altura	Diametro Diameter Diamètre Durchmesser Diámetro	Lunghezza Length Longeur Länge Longitud	Pressione massima d'esercizio Maximun working pressure Pression maximale d'exercice Maximaler Betriebsdruck Presión máxima de trabajo	Pressione di precarica standard Standard precharge pressure Pression de précharge standard Vordruck Presión de precarga estándar	Imballo Packing Emballage Verpackung Embalaje	Attacco Connection Raccordement Anschluss Conexión
		H (mm)	Ø (mm)	L (mm)	(bar)	(bar)	(mm)	(inch)
VAV5000	AA5VH32R72QP0	3645	1450	-	10	4	(Pz1) 1450X1600X3645	DN80
VAV10000	AA1VH32R82QP0	5750	1600	-	10	4	(Pz1) 1750X5750X1600	DN80

Marcati CE secondo la Direttiva - CE marked according to Directive - Avec le marque CE selon la Directive - CE Kennzeichnung - Marcados CE según la Directiva
2014/68/UE