


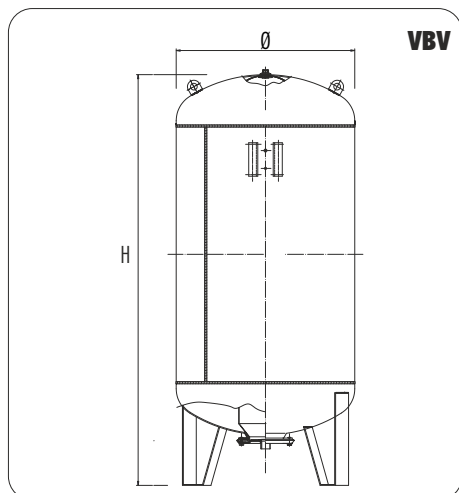

Vaso autoclave ad alta pressione con membrana intercambiabile per circuiti di acqua sanitaria.
 High pressure tank with replaceable membrane for pressurized systems of sanitary water.
 Réservoir haute pression à vessie remplaçable pour systèmes d'eau sanitaire.
 Vertikales hoher Druckausdehnungsgefäß mit austauschbarer Membrane für Trinkwassersysteme.
 Acumulador hidroneumático con membrana recambiable para circuitos de agua sanitaria.

Temperatura d'esercizio
 Working temperature
 Température d'exercice
 Betriebstemperatur
 Temperatura de trabajo

- 10° C
 + 100° C

Colore della verniciatura esterna
 External finish color
 Couleur de la peinture externe
 Externe Beendenfarbe
 Color pintura exterior

RAL 3000

Membrana in gomma
 Rubber membrane
 Vessie en gomme
 Gummimembrane
 Membrana en goma

EPDM

Controflangia verniciata - Painted counter flange
 Contre-bride peinte - Lackierter Gegenflansch - Contra brida pintada



Garanzia sul prodotto mesi: - Warranty months:
 Garantie mois: - Monate Garantie: - Garantía meses:

24

Modello Model Modèle Model Modelo	Codice Code Code Code Código	Altezza Height Hauteur Höhe Altura	Diametro Diameter Diamètre Durchmesser Diámetro	Lunghezza Length Longeur Länge Longitud	Pressione massima d'esercizio Maximun working pressure Pression maximale d'exercice Maximaler Betriebsdruck Presión máxima de trabajo	Pressione di precarica standard Standard precharge pressure Pression de précharge standard Vordruck Presión de precarga estándar	Imballo Packing Emballage Verpackung Embalaje	Attacco Connection Raccordement Anschluss Conexión
VBV750	AAXBH31R31GPO	1900	750	-	16	4	(Pz1) 750X750X2030	2"
VBV1000	AAYBH31R31GPO	2180	800	-	16	4	(Pz1) 800X800X2330	2"
VBV1500	AAZBH31R31GPO	2360	960	-	16	4	(Pz1) 1200X1200X2500	2"
VBV2000	AAABH32R32GPO	2520	1100	-	16	4	(Pz1) 1100X1100X2670	2"
VBV3000	AABBH32R32OP0	2760	1200	-	16	4	(Pz1) 120X1350X2760	DN65
VBV4000	AA4BH32R62QP0	3100	1450	-	16	4	(Pz1) 1430X1600X3100	DN80

Temperatura d'esercizio
 Working temperature
 Température d'exercice
 Betriebstemperatur
 Temperatura de trabajo

- 10° C
 + 100° C

Colore della verniciatura esterna
 External finish color
 Couleur de la peinture externe
 Externe Beendenfarbe
 Color pintura exterior

RAL 3000

Membrana in gomma
 Rubber membrane
 Vessie en gomme
 Gummimembrane
 Membrana en goma

BUTYL

Controflangia verniciata - Painted counter flange
 Contre-bride peinte - Lackierter Gegenflansch - Contra brida pintada



Garanzia sul prodotto mesi: - Warranty months:
 Garantie mois: - Monate Garantie: - Garantía meses:

24

Modello Model Modèle Model Modelo	Codice Code Code Code Código	Altezza Height Hauteur Höhe Altura	Diametro Diameter Diamètre Durchmesser Diámetro	Lunghezza Length Longeur Länge Longitud	Pressione massima d'esercizio Maximun working pressure Pression maximale d'exercice Maximaler Betriebsdruck Presión máxima de trabajo	Pressione di precarica standard Standard precharge pressure Pression de précharge standard Vordruck Presión de precarga estándar	Imballo Packing Emballage Verpackung Embalaje	Attacco Connection Raccordement Anschluss Conexión
VBV5000	AA5BH32R72QP0	3645	1450	-	16	4	(Pz1) 1450X1600X3645	DN80
VBV10000	AA1BH32R82QP0	5750	1600	-	16	4	(Pz1) 1750X5750X1600	DN80