


SERIE VB-VBV 16 bar

VBV



VBV

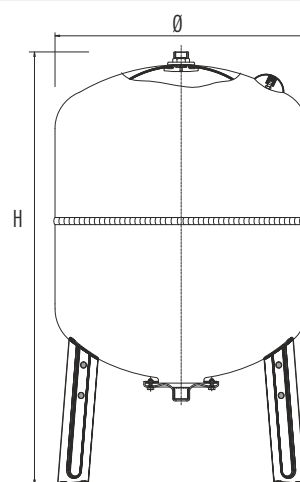

Vaso autoclave ad alta pressione con membrana intercambiabile per circuiti di acqua sanitaria.
 High pressure tank with replaceable membrane for pressurized systems of sanitary water.
 Réservoir haute pression à vessie remplaçable pour systèmes d'eau sanitaire.
 Vertikales hoher Druckausdehnungsgefäß mit austauschbarer Membrane für Trinkwassersysteme.
 Acumulador hidroneumático con membrana recambiable para circuitos de agua sanitaria.

Temperatura d'esercizio
 Working temperature
 Température d'exercice
 Betriebstemperatur
 Temperatura de trabajo

- 10° C
 + 100° C

Colore della verniciatura esterna
 External finish color
 Couleur de la peinture externe
 Externe Beendenfarbe
 Color pintura exterior

RAL 5015

Membrana in gomma
 Rubber membrane
 Vessie en gomme
 Gummimembrane
 Membrana en goma

EPDM

Controflangia zincata - Counter flange galvanized
 Contre-bride galvanisé - Gegenflansch verzinkt - Contra brida galvanizada



Garanzia sul prodotto mesi: - Warranty months:
 Garantie mois: - Monate Garantie: - Garantía meses:

24

Modello Model Modèle Model Modelo	Codice Code Code Code Código	Altezza Height Hauteur Höhe Altura H (mm)	Diametro Diameter Diamètre Durchmesser Diámetro Ø (mm)	Lunghezza Length Longeur Länge Longitud L (mm)	Pressione massima d'esercizio Maximun working pressure Pression maximale d'exercice Maximaler Betriebsdruck Presión máxima de trabajo (bar)	Pressione di precarica standard Standard precharge pressure Pression de précharge standard Vordruck Presión de precarga estándar (bar)	Imballo Packing Emballage Verpackung Embalaje (mm)	Attacco Connection Raccordement Anschluss Conexión (inch)
VB8	AAEBG00B01DA1	310	200	-	16	2	(Pz1) 220X225X335	3/4 "
VB18	AAGBG00B01DA1	430	270	-	16	2	(Pz1) 290X290X450	3/4 "
VB24	AAIBG00B01EA1	483	270	-	16	2	(Pz1) 290X290X510	1 "
VB35	AAJBG00B01EA1	440	365	-	16	2	(Pz1) 380X400X460	1 "
VBV50	AAKBG01B01EA1	720	365	-	16	2	(Pz1) 380X380X730	1 "
VBV60	AALBG01B01EA1	808	365	-	16	2	(Pz1) 380X390X820	1 "
VBV80	AAMBG01B01EA1	810	415	-	16	2	(Pz1) 420X430X820	1 "
VBV100	AANBG01B11EA1	849	495	-	16	2	(Pz1) 510X520X850	1 "
VBV150	AAPBG01B11EA1	975	550	-	16	2	(Pz1) 560X570X1000	1 "

Temperatura d'esercizio
 Working temperature
 Température d'exercice
 Betriebstemperatur
 Temperatura de trabajo

- 10° C
 + 100° C

Colore della verniciatura esterna
 External finish color
 Couleur de la peinture externe
 Externe Beendenfarbe
 Color pintura exterior

RAL 5015

Membrana in gomma
 Rubber membrane
 Vessie en gomme
 Gummimembrane
 Membrana en goma

EPDM

Controflangia verniciata - Painted counter flange
 Contre-bride peinte - Lackierter Gegenflansch - Contra brida pintada



Garanzia sul prodotto mesi: - Warranty months:
 Garantie mois: - Monate Garantie: - Garantía meses:

24

VBV200	AAQBG31B11FA1	1085	600	-	16	2	(Pz1) 610X620X1111	1 1/4 "
VBV300	AASBG32B11FA1	1240	650	-	16	2	(Pz1) 670X680X1290	1 1/4 "
VBV500	AAUBG32B11FA1	1490	750	-	16	2	(Pz1) 750X770X1510	1 1/4 "

Controflangia inox AISI 304 disponibile su richiesta. - Stainless steel AISI 304 counter flange available on request.
 Contre bride inox AISI 304 disponible sur requête. - Inox Flansch AISI 304 auf Anfrage. - Contra brida en acero inox AISI 304 bajo demanda.

Marcati CE secondo la Direttiva - CE marked according to Directive - Avec le marque CE selon la Directive - CE Kennzeichnung - Marcados CE según la Directiva

2014/68/UE