



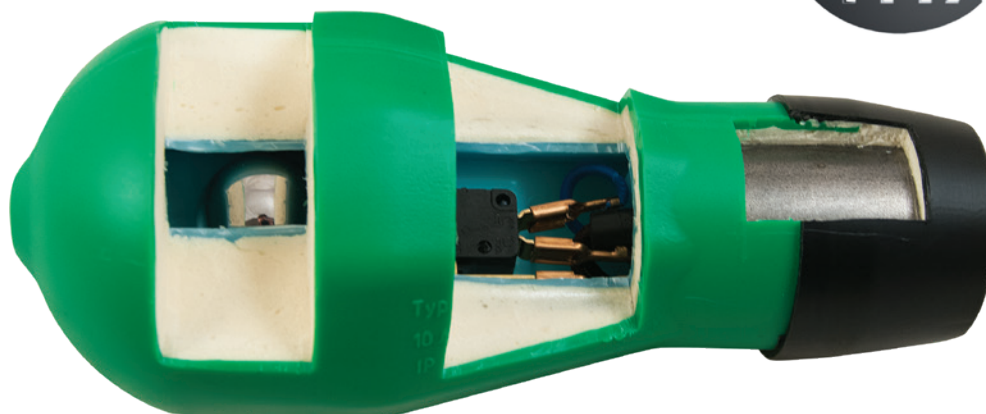

DISEGNO TECNICO / TECHNICAL DRAWING / DESSIN TECHNIQUE

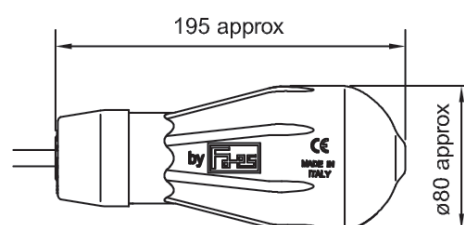

CAVI STANDARD / STANDARD CABLES / CÂBLES STANDARD

PVC A05VV-F 3X1 mmq (doppio scambio) / (Double function) / (Double échange)
HO7RN-F 3X1 mmq (doppio scambio) / (Double function) / (Double échange)

CARATTERISTICHE TECNICHE / SPECIFICATIONS / CARACTÉRISTIQUES TECHNIQUES

Temperatura di esercizio / Operating temperature / Température de service	50 °C
Temperatura di stoccaggio / Storage temperature / Température de stockage	-20÷80 °C
Tensione di esercizio / Operating voltage / Température de service	230 V a.c.
Tensione massima di commutazione / Max switching voltage / Tension max de commutation	250 V a.c.
Frequenza / Frequency / Fréquence	50-60 Hz
Angolo di commutazione superiore / Upper switching angle / Angle de commutation supérieur	30° ±5°
Angolo di commutazione inferiore / Lower switching angle / Angle de commutation inférieur	20° ±5°
Corrente con carico resistivo / Current with resistive load / Courant avec charge résistive	10 A
Corrente con carico induttivo / Current with inductive load / Courant avec charge inductive	4 A
Portata microinterruttore / Microswitch capacity / Capacité électrique micro-interrupteur	16 A
Grado di protezione / Protection level / Niveau de protection	IP 68
Classe d'isolamento / Insulation class / Classe d'isolation	II
Funzionamento / Working / Opération	1 B
PTI	175
Grado di inquinamento / Pollution degree / Degré de pollution	2
Pressione di esercizio / Operating pressure / Pression de service	10 bar
Dimensioni / Dimensions / Dimensions	195x84 mm
Peso / Weight / Poids	625 g
Volume / Cubage / Volume	630 cm ³
Densità (peso specifico) del liquido da controllare Density (specific weight) of the liquid to be controlled Densité du liquide à vérifier	Min. 0,7 - Max 1,5 kg/dm ³