
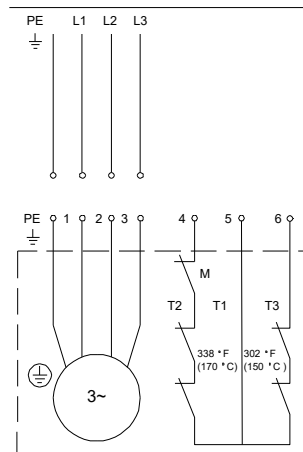


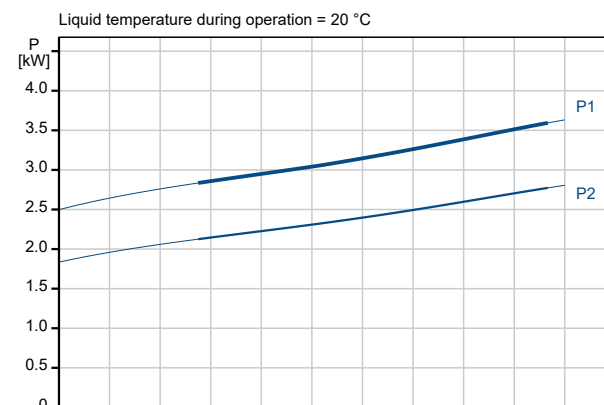


Qty.	Description
1	SEG.40.31.2.60G  Note! Product picture may differ from actual product Product No.: On request Grundfos SEG grinder pumps are non-self-priming, single-stage, centrifugal pumps with horizontal discharge port, specifically designed for pumping wastewater containing discharge from toilets. The pump is equipped with a grinder system that grinds destructible solids into small pieces to lead them through pipes with a relatively small diameter. SEG grinder pumps are ideal for use in sparsely populated areas, where gravity sewage systems are not available. Examples include villages, farm areas and areas with large terrain-level differences, where a pressurised system has advantages. The pump is available for two types of installation: • submerged installation on auto-coupling systems • submerged installation, free-standing. The pump is made of wear-resistant materials, such as cast iron and stainless steel. These materials ensure reliable operation. The surface of the pump is smooth to prevent dirt and impurities from sticking. The corrosion-resistant stainless steel clamp is securing the motor to the pump housing and allow the easy service of the pump. SmartTrim system allows easy adjustment of the impeller clearance to ensure maximum efficiency during the pump lifespan. The range is designed to reduce energy consumption and keep downtime costs to a minimum, while maintaining peak performance throughout the lifespan of the system. Further product details This grinder pump is specially designed for pumping effluent and untreated domestic sewage in areas with no sewer system or where gravitation systems are unsuitable. The pump is designed for transfer of domestic and municipal wastewater: - in sparsely populated areas - in small villages and farms - in areas of difficult topography - in areas with high groundwater The pump can also remove industrial wastewater containing fibres in industrial applications, such as washing plants. Pump The pump is primarily made of cast iron with surface treatment of powder coating: black NCS9000N/RAL 9005, gloss 30, thickness 100 µ. The pump features a patented grinder system, ensuring extremely high efficiency and reliable operation. Quick and easy dismantling for replacement of wear parts. No special tools are required.

Qty.	Description
1	 A stainless-steel clamp connection between motor and pump housing ensures easy inspection and service of the impeller and shaft seal. The shaft seal consists of a double cartridge seal that ensures a reliable sealing between the pumped liquid and motor. - Primary seal: silicon carbide/silicon carbide (SiC/SiC) mechanical shaft seal - Secondary seal: carbon/aluminium oxide mechanical shaft seal This pump is equipped with the unique SmartTrim system that enables you to easily restore the factory-set impeller clearance and maintain peak pumping efficiency. To do this, remove the cutter head and adjust the SmartTrim nut on the impeller. This can be done on site without dismantling the pump and without using special tools. The pump has been tested and approved by CSA. Motor The motor is a watertight, totally encapsulated motor, supplied with a 10 m power cable. The stainless-steel plug is fastened with a union nut. This nut and O-rings provide sealing against ingress of the liquid. The plug is polyurethane-embedded, ensuring a watertight and durable seal around the leads of the cable. This prevents the ingress of water into the motor through the cable in case of cable breakage or adverse handling in connection with installation or service. The motor construction is compact with a short shaft. This reduces vibrations, resulting in an increased efficiency and life of the shaft seal and ball bearings. The motor has two thermal switches in the motor windings to protect the motor against overheating. Controls: Moisture sensor: without moisture sensors AUTOADAPT: No Liquid: Liquid temperature range: 0 .. 40 °C Selected liquid temperature: 20 °C Density: 998.2 kg/m³ Technical: Type of impeller: GRINDER SYSTEM Primary shaft seal: SIC/SIC Approvals: PA-I Curve tolerance: ISO9906:2012 3B2 Materials: Pump housing: Cast iron EN1561 EN-GJL-200 Impeller: Cast iron EN1561 EN-GJL-200 Installation: Maximum ambient temperature: 40 °C Maximum operating pressure: 6 bar Flange standard: DIN Pipework connection: DN 40/50 Pump outlet: DN 40

Qty.	Description
1	Pressure rating: PN 10 Maximum installation depth: 7 m Auto-coupling: 96076063 Electrical data: Power input - P1: 4 kW Rated power - P2: 3.1 kW Mains frequency: 60 Hz Rated voltage: 3 x 380 V Voltage tolerance: +6/-10 % Max starts per hour: 30 Rated current: 7 A Starting current: 49.6 A Rated current at no load: 2.3 A Cos phi - power factor: 0.88 Cos phi - p.f. at 3/4 load: 0.84 Cos phi - p.f. at 1/2 load: 0.77 Rated speed: 3482 rpm Moment of inertia: 0.0258 kg m² Motor efficiency at full load: 78 % Motor efficiency at 3/4 load: 76 % Motor efficiency at 1/2 load: 72 % Number of poles: 2 Start. method: direct-on-line Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): F Explosion proof: no Ex-description: WITHOUT (STANDARD) Length of cable: 10 m Cable type: SEOOW 600V Type of cable plug: No plug Others: Net weight: 81 kg Country of origin: HU Custom tariff no.: 841381200000

Description	Value
General information:	
Product name:	SEG.40.31.2.60G
Product No:	On request
EAN number:	On request
Technical:	
Max. flow:	4.72 l/s
Max. head:	39.6 m
Type of impeller:	GRINDER SYSTEM
Primary shaft seal:	SIC/SIC
Approvals:	PA-I
Curve tolerance:	ISO9906:2012 3B2
Materials:	
Pump housing:	Cast iron
	EN1561 EN-GJL-200
Impeller:	Cast iron
	EN1561 EN-GJL-200
Installation:	
Maximum ambient temperature:	40 °C
Maximum operating pressure:	6 bar
Flange standard:	DIN
Pipework connection:	DN 40/50
Pump outlet:	DN 40
Pressure rating:	PN 10
Maximum installation depth:	7 m
Inst dry/wet:	SUBMERGED
Auto-coupling:	96076063
Liquid:	
Liquid temperature range:	0 .. 40 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m ³
Electrical data:	
Power input - P1:	4 kW
Rated power - P2:	3.1 kW
Mains frequency:	60 Hz
Rated voltage:	3 x 380 V
Voltage tolerance:	+6/-10 %
Max starts per hour:	30
Rated current:	7 A
Starting current:	49.6 A
Rated current at no load:	2.3 A
Cos phi - power factor:	0.88
Cos phi - p.f. at 3/4 load:	0.84
Cos phi - p.f. at 1/2 load:	0.77
Rated speed:	3482 rpm
Moment of inertia:	0.0258 kg m ²
Motor efficiency at full load:	78 %
Motor efficiency at 3/4 load:	76 %
Motor efficiency at 1/2 load:	72 %
Number of poles:	2
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Explosion proof:	no
Ex-description:	WITHOUT (STANDARD)
Built-in motor protection:	THERMAL SWITCH
Thermal protec:	external
Length of cable:	10 m
Cable type:	SEOOW 600V
Type of cable plug:	No plug

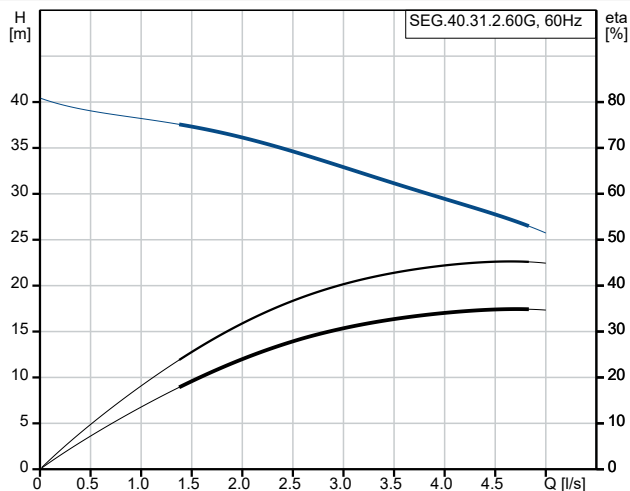



Company name: Modern pumps Co.

Created by:



Phone:

Email:

Date:



Description	Value
Controls:	
Control box:	not included
Additional I/O:	External
Moisture sensor:	without moisture sensors
AUTOADAPT:	No
Others:	
Net weight:	81 kg
Country of origin:	HU
Custom tariff no.:	841381200000

On request SEG.40.31.2.60G 60 Hz

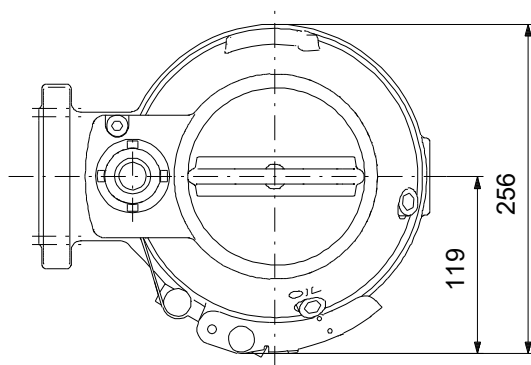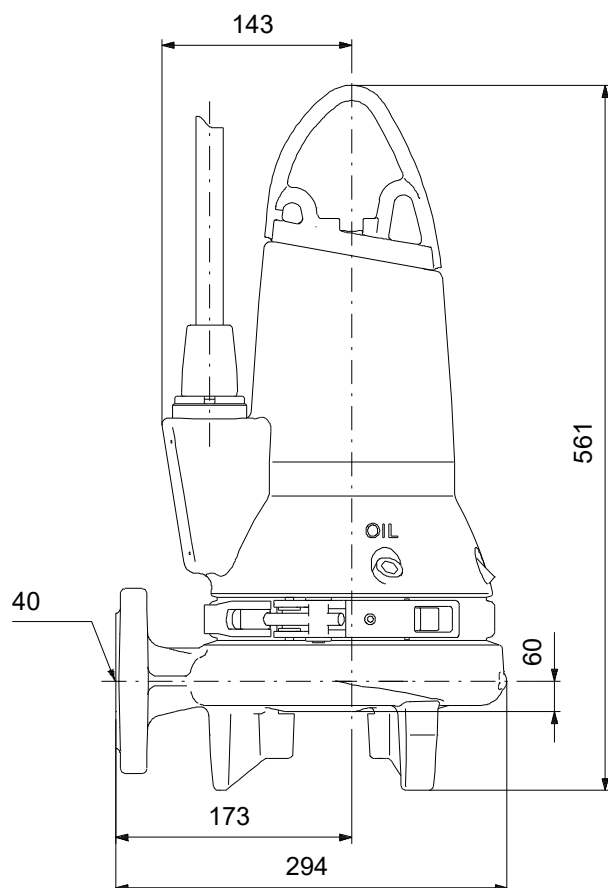

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.



On request SEG.40.31.2.60G 60 Hz

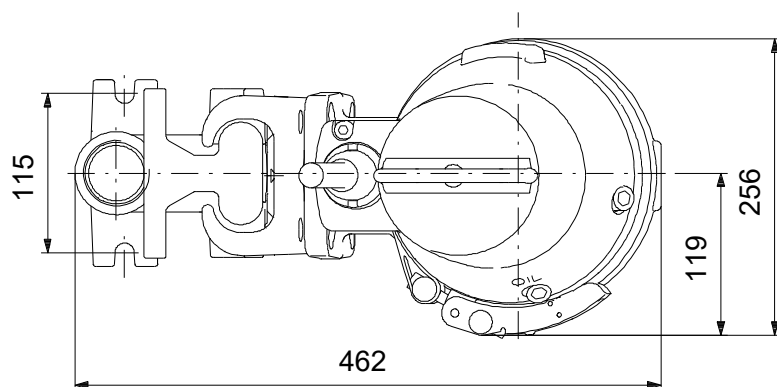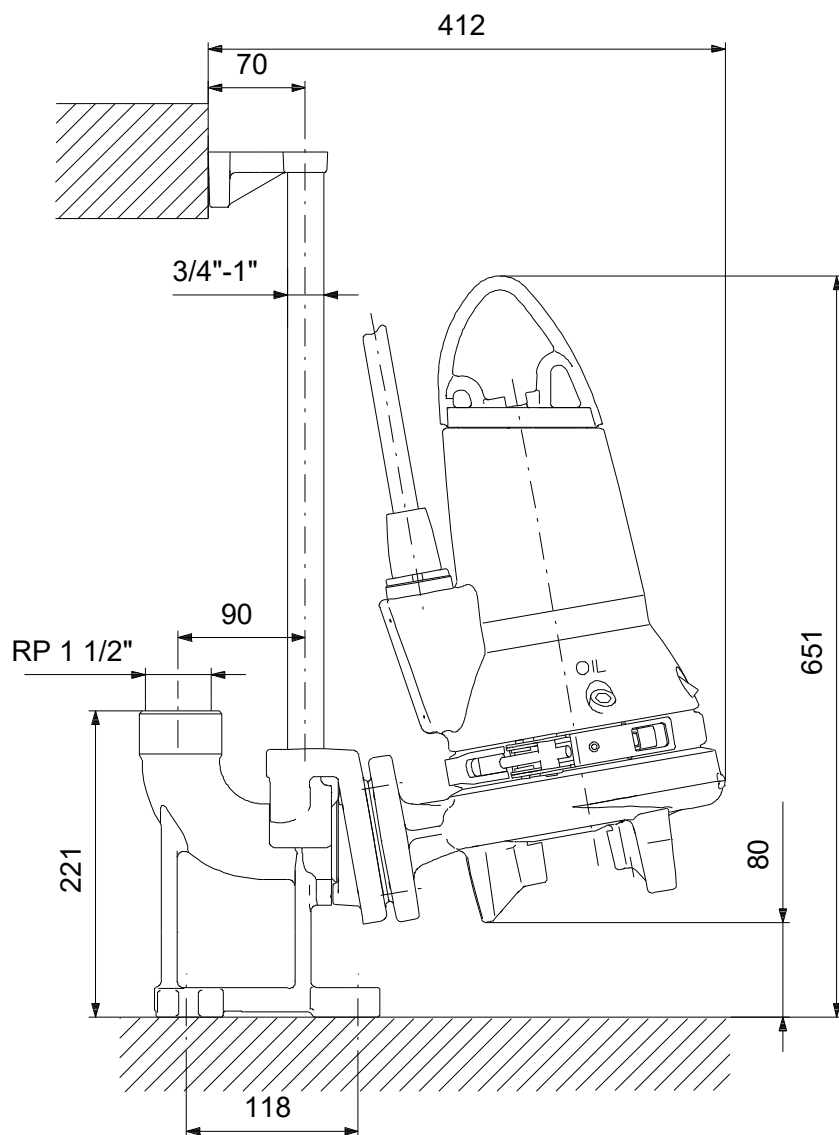

Note! All units are in [mm] unless others are stated.

Disclaimer: This simplified dimensional drawing does not show all details.

On request SEG.40.31.2.60G 60 Hz

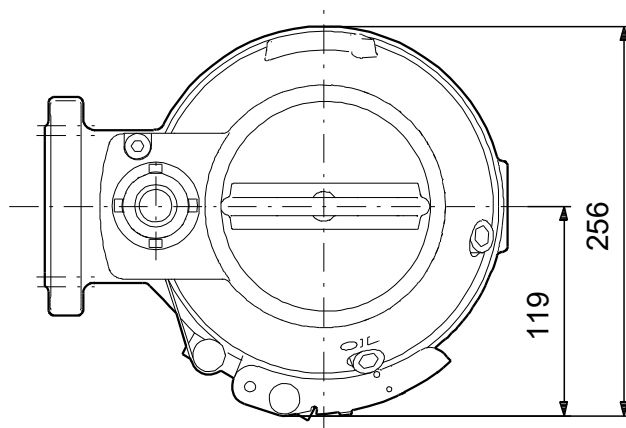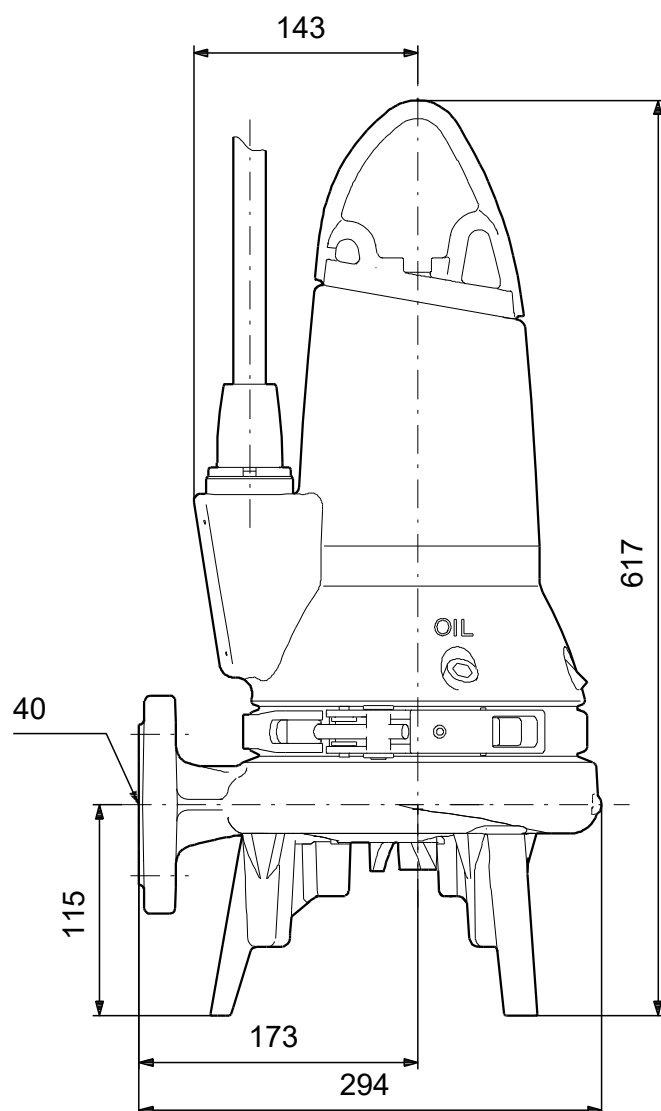

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.